


## General Notes

1. Temporary Loops are to be provided by the homeowner, electrician, contractor, etc.
2. There needs to be at least 18 inches of conductor out of the weatherhead.
3. Minimum wire size is #4 copper conductor or #2 aluminum.
4. All connections need to be made in rain tight boxes.
5. All conductors must be in conduit and secured to the post.
6. Clearance for the overhead conductor must be at least 18' if crossing an area susceptible to truck traffic.
7. The temporary loop must be set within 15' of an MJM pole.
8. MJM will provide conductor and wedge clamp for connection at weatherhead.
9. The member is responsible for installing a temporary ground rod for the service.
10. Meter base needs to meet National Electric Code.

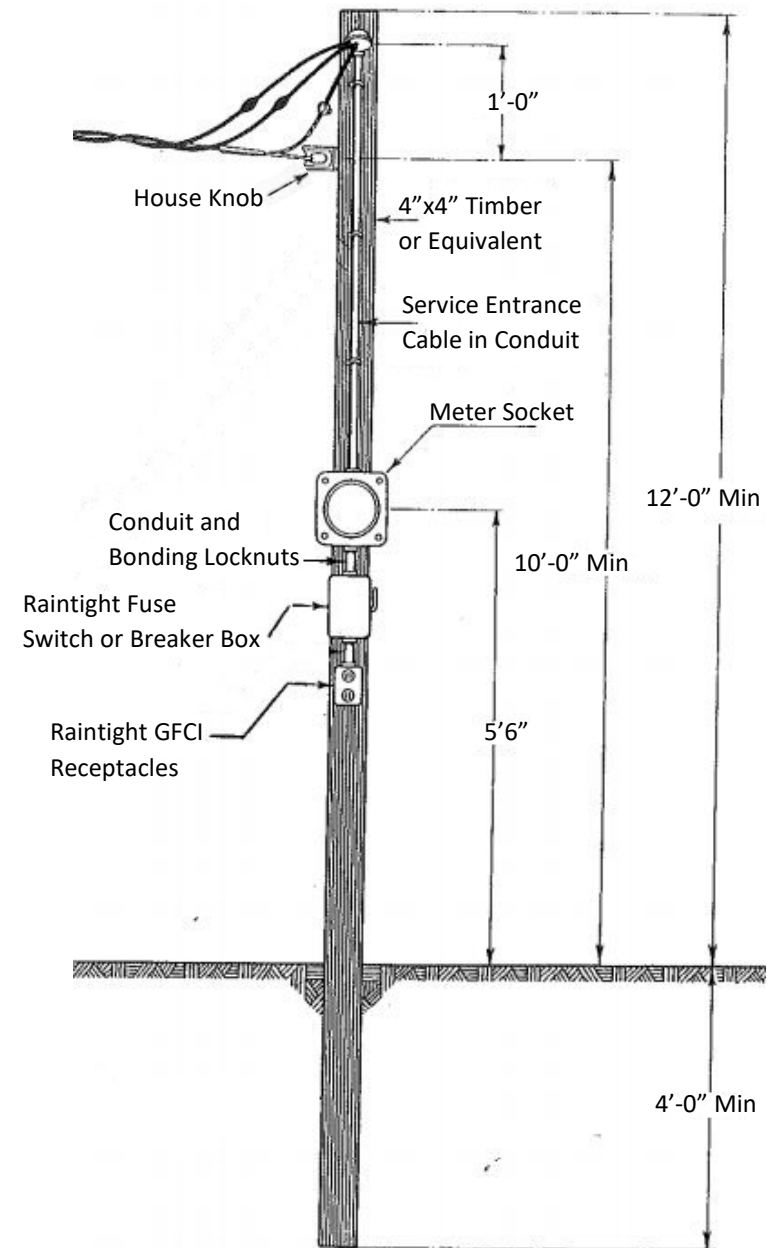

Overhead Temporary Service Installation  
Single Phase 120/240 Volts